




The Line 6® EX2™ can be used as either an Expression Pedal, Footswitch, or both with Helix Stadium devices and is also compatible with select Helix®, HX®, POD®, and DL4™ MkII products. The EX2 Expression Pedal is rated at 10k Ohms, and its Toe Switch is momentary (non-latching).

EX2


CHEAT SHEET

TOE SWITCH



(Beneath treadle)
Push pedal forward firmly to engage the switch.

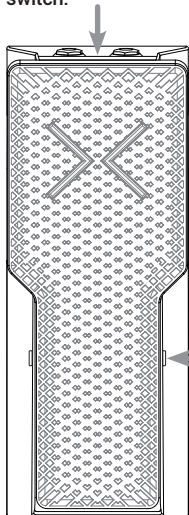


HELIX STADIUM XL and HELIX STADIUM



For Pedal and Switch Control:
Connect from the EX2 PEDAL-TOE SWITCH jack to the Helix Stadium CONTROL A/B (or C/D) jack using one TRS to TRS cable.



For Pedal or Switch Control:
Connect from either the EX2 PEDAL or TOE SWITCH jack to the Helix Stadium CONTROL A/B (or C/D) jack using one TS to TS cable.


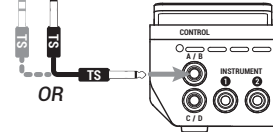


Tension Adjust

Use the included hex wrench to adjust the pedal for the desired tension.


HELIX RACK, HELIX FLOOR, HELIX LT, and HX EFFECTS

For Pedal Control: Connect from the EX2 PEDAL jack to any Helix - EXP or HX Effects - PEDAL jack using one TS to TS cable.

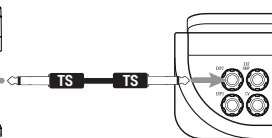



For complete configuration details, please also see the *Owner's Manual* for your Line 6 device, available at line6.com/manuals.


HX STOMP XL, HX STOMP, HX ONE, DL4 MKII, and POD EXPRESS




For Pedal and Switch Control:
Connect from the EX2 PEDAL - TOE SWITCH jack to your device's combination EXP - FS jack using one TRS to TRS cable.




For Pedal or Switch Control:
Connect from the EX2 PEDAL or TOE SWITCH jack to your device's combination EXP - FS jack using one TS to TS cable.



POD GO WIRELESS and POD GO



For Pedal or Switch Control:
Connect from the EX2 PEDAL or TOE SWITCH jack to your device's combination EXP 2 - Footswitch 7/8 jack using one TS to TS cable.



LINE 6

EX2
CHEAT SHEET