

GENZ·BENZ



OWNERS MANUAL



Features:

- 35 Watt Acoustic Amp
- 1– XLR and 2– 1/4" Inputs
- Master Volume
- Tilt-back Cabinet Design
- Master 3-Band EQ with Sweepable Mid
- 2 Channel with separate Volume and Effects Controls
- XLR Direct Out
- 10" Speaker and Compression Tweeter
- Phantom Power
- Alesis® Digital Effects with 15 presets

PRODUCT DESCRIPTION – The **Shenandoah™ JR** is configured as a 2 channel – 3 input 35 watt acoustic instrument amplifier. Each channel is equipped with a 1/4" unbalanced line input and channel 1 is also equipped with an XLR balanced microphone input (with phantom power). The 2 inputs on channel 1 are summed (mixed) together at a 1:1 ratio. Both channels are mixed together and pass through a 3 band equalizer with a sweepable midrange frequency control. Equalization centers were carefully selected for use with acoustic instruments. Each channel also contains individual send controls to the on-board Alesis® 15 program digital effects circuit. The channel signals are then summed together, mixed with the digital effects return and passed on to the internal 35 watt power amplifier. The back panel contains an XLR balanced output with ground lift switch, unbalanced line output, and a 1/4" speaker jack.

INPUTS – The **Shenandoah™ JR** is equipped with 2 types of input jacks. The ¼" input is unbalanced and accepts instrument level to line level with a useable sensitivity from 100 mV to 1 volt. The input impedance is 300 k ohms. The ¼" input will also accept most active balanced line sources, automatically unbalancing them by recognizing the tip portion of the balanced signal. Additionally, the precision input scaling preamp contains a 50 Hz, 12 dB/octave high pass filter (more effective and less intrusive than the more common 6 dB filters) and an "RFI" filter (radio frequency interference) to eliminate unwanted noise. The XLR input jack is balanced and "microphone level", with a useable sensitivity from –60dBv to –30 dBv. It contains a precision full range differential microphone preamp with phantom power. For use with higher level sources (such as the balanced line level output from a keyboard), a balanced pad network will be necessary to use the balanced input. Phantom power is 13.6 volts, compatible with virtually all commonly used condenser microphones. Dynamic microphones can be used with no ill effect.

COMBINING XLR & ¼" INPUTS – A unique feature of the **Shenandoah™ JR** is the ability to mix the XLR balanced and ¼" unbalanced inputs on channel 1. In many situations, this effectively makes the amplifier function as a 3 channel amplifier. The most effective way to use this feature is to set the volume on the channel using the XLR microphone input and then adjusting the level control on the instrument itself (assuming that it has one) to blend levels between the 2 inputs.

ON-BOARD ALESIS® DIGITAL EFFECTS – The **Shenandoah™ JR** contains a genuine Alesis® 15 program digital effects processor. Unlike other amplifier manufacturer's built-in digital effects units, we chose to use an industry leader in processing with an undisputed reputation for realistic, high quality effects algorithms. Level differences are normal when switching between different effects; just adjust the channel send and master level controls accordingly. The effects level control on each channel adjusts the send level to the digital effects processor. The digital effects level in the master section controls the effects return level from the processor.

Name	Description
Hall 1	Bright hall reverb
Hall 2	Warm hall reverb
Room 1	Hardwood studio reverb
Room 2	Ambient room reverb
Room 3	Warm room reverb for guitars and rhythm instruments.
Plate 1	Classic plate reverb for lead vocals and instruments.
Plate 2	Sizzling bright plate reverb for vocals.
Plate 3	Short "vintage" plate reverb
Chorus	Chorus (Tonal variations in pitch and volume)
Flange	Flanger for jet wash effects.
Delay 1	125ms slapback delay
Delay 2	190ms slapback delay
Chorus/Plate	Chorus with reverb plate
Chorus/Room	Auto-wah guitar effect with reverb
Bypass	No effect
Rotary Speaker	Rotary speaker emulation

ACTIVE EQUALIZATION – The **Shenandoah™ JR** contains a master 3 band (with sweepable mid) active equalizer. This equalizer, similar to those found on professional sound consoles, are very useful tools when used correctly. The corner frequency of the low frequency section is 125 Hz, shelving curve. This frequency is particularly handy when dealing with low frequency feedback from a big dreadnaught guitar. A combination of volume reduction and turning down the low frequency control will generally get good results. Become familiar with the action of the controls since their effective gain range is quite large. The low frequency control is also handy for adding some "bottom" to a baritone sax and "chunk" to a mandolin or mando-cello. The corner frequency of the high frequency section is 8 kHz, shelving curve. This frequency is especially useful for taming the bright harshness of some mandolins, violins, brass and reeds. It can also be used to help acoustic guitars, cellos and flutes cut through other players in loud club situations. The "sweepable mid" section features 12 dB of cut or boost with a bandwidth approximately 1 octave wide. The center frequency of this filter is continuously user adjustable from 250 Hz to 5 kHz with a single control. This filter is typically (but not always) used to reduce or remove offending frequencies in the instrument's pick-up response. Removing only the minimum amount necessary will yield the most acoustically rewarding results. The easiest and most repeatable way to determine the offending frequency range is to boost the mid level somewhat

(but not to the point of feedback) and while playing, sweep the frequency control slowly across its range. You may need a third hand until it becomes second nature, but soon you will find out just how quick it can be. You will hear a clear and obvious accentuation of the ugliness you want to remove. The ear is a most sensitive and discriminating piece of test equipment when used in this manner, another good reason to protect them! This is the way many touring sound engineers equalize, since it is quick, accurate and repeatable. Occasionally, you will find need to use the mid section in “boost” mode, particularly common when adding higher mids (bite) to an otherwise dull instrument, or adding low mid “body” to an otherwise thin sound. Spend some time experimenting so that the process becomes creative as well as corrective.


MASTER VOLUME – The master volume control adjusts the overall volume of channel 1, channel 2 and the effects return. Typically, best results are obtained when this control is operated between the 9:00 o'clock and 3:00 o'clock positions.

PHANTOM POWER – An internal phantom power source (13.6 volts) is provided for use with condenser mics. This power source is on at all times and does not affect the standard operation of the amp, even when a condenser mic is not used. We use the DIN 45-596-P12 volt standard which will operate virtually all of the live sound reinforcement condenser microphones on the market. Some “boutique” externally biased condenser mics will not be compatible and will require 48 volt phantom power. *We suggest live sound condenser mics by: AKG (C4500B, 4000B, etc.), Audio Technica (AT3035, 3032, Pro Series, etc.), CAD, Shure and Crown.*

DIRECT OUTPUTS – The **Shenandoah™ JR** is equipped with an XLR balanced direct output and an unbalanced ¼” line level output. Both the XLR balanced and ¼” unbalanced outputs make “real world sense” when connecting with other equipment. The ¼” unbalanced outputs are true professional line level (+4 dBv) with an output impedance of 1k ohm, and can drive virtually any line level input, including power amplifiers. The XLR balanced output is “hot” mic level, rated at –30 dBv. This configuration allows the **Shenandoah™ JR** to drive very long cable lengths (250+ feet) without problems or added noise. The XLR balanced direct outputs can be “ground lifted” with the switch provided. This switch lifts pin 1 on the XLR balanced output to break any ground loops between the **Shenandoah™ JR** and a PA system. Both outputs are post master volume/post eq/post effects to aid in sending a “finished” mixed signal to a PA system or external power amplifier.

POWER AMPLIFIER – The **Shenandoah™ JR** contains an advanced monolithic power amplifier circuit that is completely protected against overloads, short circuits and thermal faults. Output is rated at 35 watts into 4 ohms, with excellent overload recovery characteristics.

SPEAKER OUTPUT JACK – The **Shenandoah™ JR** provides a ¼” speaker output jack. Minimum total load is 4 ohms.

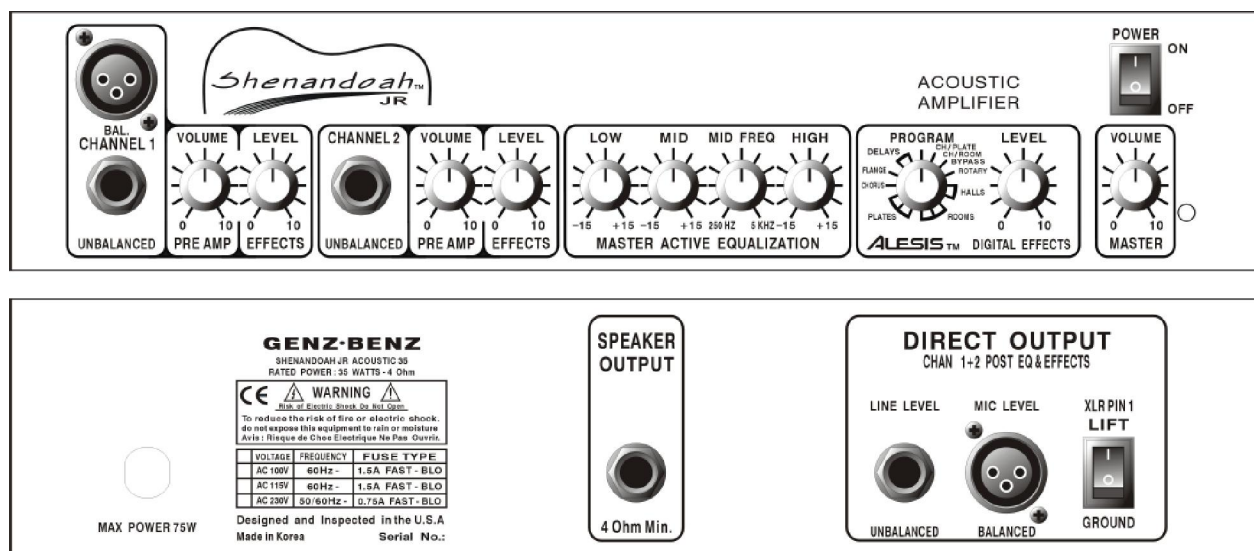

SPEAKER CABINET DESIGN – The **Shenandoah™ JR** utilizes a specially designed 10" woofer and compression tweeter. The cabinet features a front port for more rounded low frequency response. The impedance of the internal speaker is 4 ohms.

BOTTOM MOUNTED TILT-BACK HANDLE – This feature allows the cabinet to be tipped up towards the performer. This also can change the tone of the amp and reduce boomy low frequencies.

POWER INPUT – The **Shenandoah™ JR** is shipped from the factory with a connected power inlet cable and the appropriate power connector for the market the amplifier was shipped to. There is an internal AC mains fuse located on the main pcb. This is not a user replaceable part and failure of this fuse indicates a problem with the amplifier circuitry.

CAUTION!

- Never set an amplifier on anything that will tip over or collapse under its weight.
- These amplifiers are capable, of producing sound pressure levels that may cause hearing loss.
- There are no user serviceable parts inside these units. Always consult a qualified repair facility for service.

WARNING!

- The use and operation of this device constitutes an agreement of full release of any and all liability connected with its use. Only persons familiar with the operation of high powered audio equipment should attempt to operate this device.
- In addition, by use of this device, the user agrees to hold Genz Benz, Inc. and it's designers, sales agents and all other affiliates and related parties harmless in the event of any accident, injury, damage or loss resulting from such use.
- Manufacturer's sole responsibility is to provide a warranty on the specified performance of the product under normal operating conditions for a period of 3 years.

WARRANTY:

- Genz Benz, Inc. warrants the model **Shenandoah™ JR** to be free from defects in materials and workmanship for a period of 3 years from the date of purchase, when purchased from an authorized Genz Benz dealer.
- This warranty does not cover normal wear and tear incurred from the normally designed use of the product.
- This warranty is effective only if a copy of the original sales receipt is presented at the time of warranty service
- This limited warranty is completely transferable to any subsequent buyer as long as the original sales receipt is also transferred to such subsequent buyer.
- All warranty service must be performed by a Genz Benz authorized service center.
- Before returning any unit for service, a returned merchandise authorization number (RMA#) must be obtained by calling 480-941-0705.

SHENANDOAH JR

ENGINEERING SPECIFICATIONS

INPUTS

XLR Balanced input impedance:	2.2 k ohms
XLR Balanced input sensitivity:	-60 to -30 dBV
1/4" Unbalanced input impedance:	300 k ohms
1/4" Unbalanced input sensitivity:	-30 to +4 dBV

AMPLIFIER OUTPUT

Power at 4 ohm load:	35 watts RMS
THD + N (preamp):	<0.035%
THD + N (power amp):	<0.07%
Frequency response:	20 Hz – 20 kHz +/- 1dB

CHANNEL EQUALIZATION

Low frequency:	125 Hz shelving, +/-15dB
Mid frequency (sweep):	250 Hz – 5 kHz , peaking, +/-12dB
High frequency:	8 kHz shelving, +/-15dB

DIRECT OUTPUTS

XLR balanced output level:	-30 dBV nominal
XLR balanced output impedance:	150 ohms
1/4" unbalanced output level:	+4 dBv nominal
1/4" unbalanced output impedance:	1 kohm

DIGITAL EFFECTS

Processor type:	Alesis DSP engine
Internal processing:	24 bit
A/D converter:	24 bit – 64X oversampling
D/A converter:	24 bit – 128X oversampling
Dynamic Range:	80 dB
THD + N (1 kHz):	<0.01%
Sampling rate:	48 kHz

INTERNAL PRESET EFFECTS PROGRAMS:

3 – Plate Reverbs
3 – Room Reverbs
2 – Hall Reverbs
1 – Rotary Effect
1 – Chorus/Room
1 – Chorus/Plate
1 – Chorus
1 – Flange
2 – Delays (long and short)
1 – Bypass

Due to continuing product improvements and changes, all specifications are subject to change without notice

**Declaration of Conformity
(89/336 EEC-EMC Directive)**

Manufacturer's Name: Genz Benz, a division of Kaman Music
Manufacturer's Address: 7811 East Pierce Street
Scottsdale, AZ 85287, U.S.A.

Product Type: Audio Amplifier
Model Number: Shenandoah™ JR
Operating Power Condition: 115/230 V, 50/60 Hz
Effective Date: 01-01-2006

Conforms to the Following Standards:

- ☒ EN 55013: 2001 + A1: 2003
- ☒ EN 55020: 2002 + A1: 2003
- ☒ EN 60065
- ☒ IEC 61000-3.3: 1994 + A1: 2001
- ☒ IEC 61000-4.2
- ☒ IEC 61000-4.3
- ☒ IEC 61000-4.4
- ☒ FCC 47CFR Part 15-B, Class B
- ☐ RoHS Directive 2002/95/EC
- ☒ WEEE Directive 2002/96/EC
- ☒ CE Mark LV Directive 73/23 EEC

GENZ·BENZ

A Kaman Music Company, Bloomfield, CT
7811 E. Pierce Street, Scottsdale, AZ 85257
PH: 480-941-0705 FAX: 480-946-2412
www.genzbenz.com