



SONICAKE

TASTE IT

Specifications:

Power: DC 9V 5.5x2.1mm center negative, 200mA

Dimensions: 93.5mm (D) x 42mm (W) x 52mm (H)

Weight: 270g


IR Processing: 24bit, 44.1kHz, 1024 points

Signal to Noise Ratio: 100dB

Frequency Range: 20Hz~20kHz



SONIC IR is a simple and efficient cabinet simulator delivering 11 selected classic guitar/bass cabinet models. You can load your own IR files. Two outputs jacks are suitable for different usage scenarios.

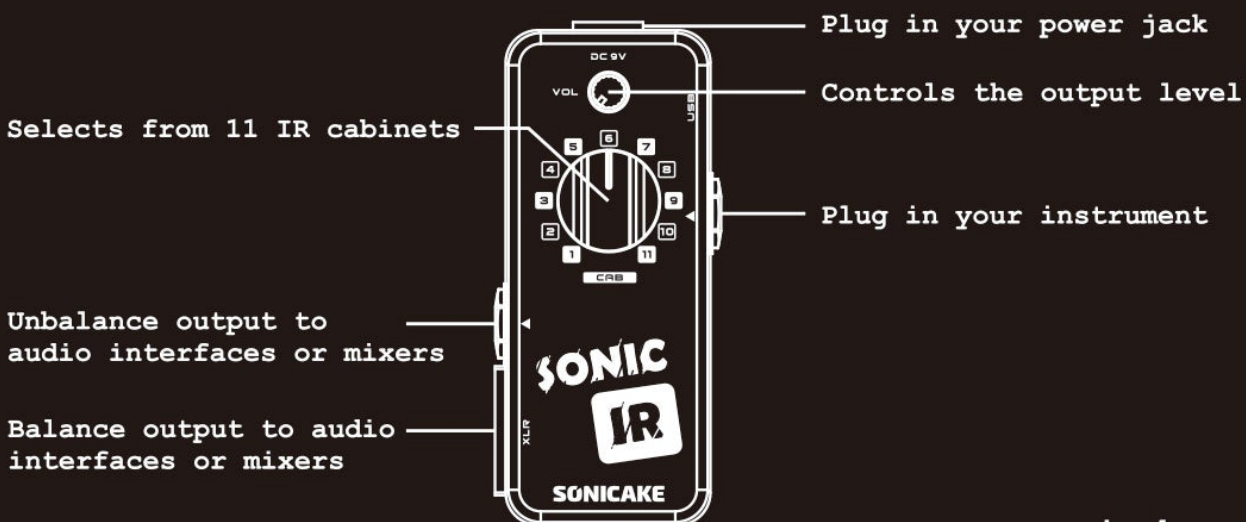

www.sonicake.com

CAB Models

No.	Name	Based On
01	Champion 1x8	Fender® Champ* 1x8" cabinet
02	Yale 2x12	Yale® 1G20* 2x12" cabinet

02	VOX® 2x12	VOX® ACS0* 2x12" cabinet
03	Tr65 2x12	Fender® '65 Twin Reverb* 2x12" cabinet
04	UK 2550 2x12	Marshall® 2550* 2x12" cabinet
05	Bm59 4x10	Fender® '59 Bassman* 4x10" cabinet
06	Tanger 4x12	Orange® PPC412* 4x12" cabinet
07	UK 1960 4x12	Marshall® 1960AV* 4x12" cabinet
08	6505 4x12	Peavey® 6505* 4x12" cabinet
09	Mebo 4x12	Mesa/Boogie® Rectifier* 4x12" cabinet
10	M Bass 2x10	Mark Bass®* 2x10" bass cabinet
11	A Bass 8x10	Ampeg® SVT-810F* 8x10" bass cabinet

**The manufacturers and product names mentioned above are trademarks or registered trademarks of their respective owners. The trademarks were used merely to identify the sound character of the products.*

MINILANE
SERIES PEDAL

SONICAKE

TASTE IT



Connect to computer to import your IR files. The Sonic IR will be recognized as a USB disk when connected.

To import an IR file:

1. Drag and drop an IR file into the USB disk. The IR file should be a 24-bit, 44.1kHz mono wav file ONLY. File name should start with a location number ranging from 01-11 (e.g. "06 My IR 4x12" is a correct name; the "06" indicates the location the file will be saved).
2. Delete the original file with the same location number.
3. Delete the "FILELIST" file in the USB disk.
4. Eject and restart the unit.

Note:

1. Please SAFELY EJECT THE DEVICE manually when disconnecting from the computer, otherwise it may cause file loss.
2. If there is no file at one location, when you switch to that location, you will hear a bypassed sound.
3. If you want to keep the factory IR files, remember to BACKUP THEM FIRST.

www.sonicake.com