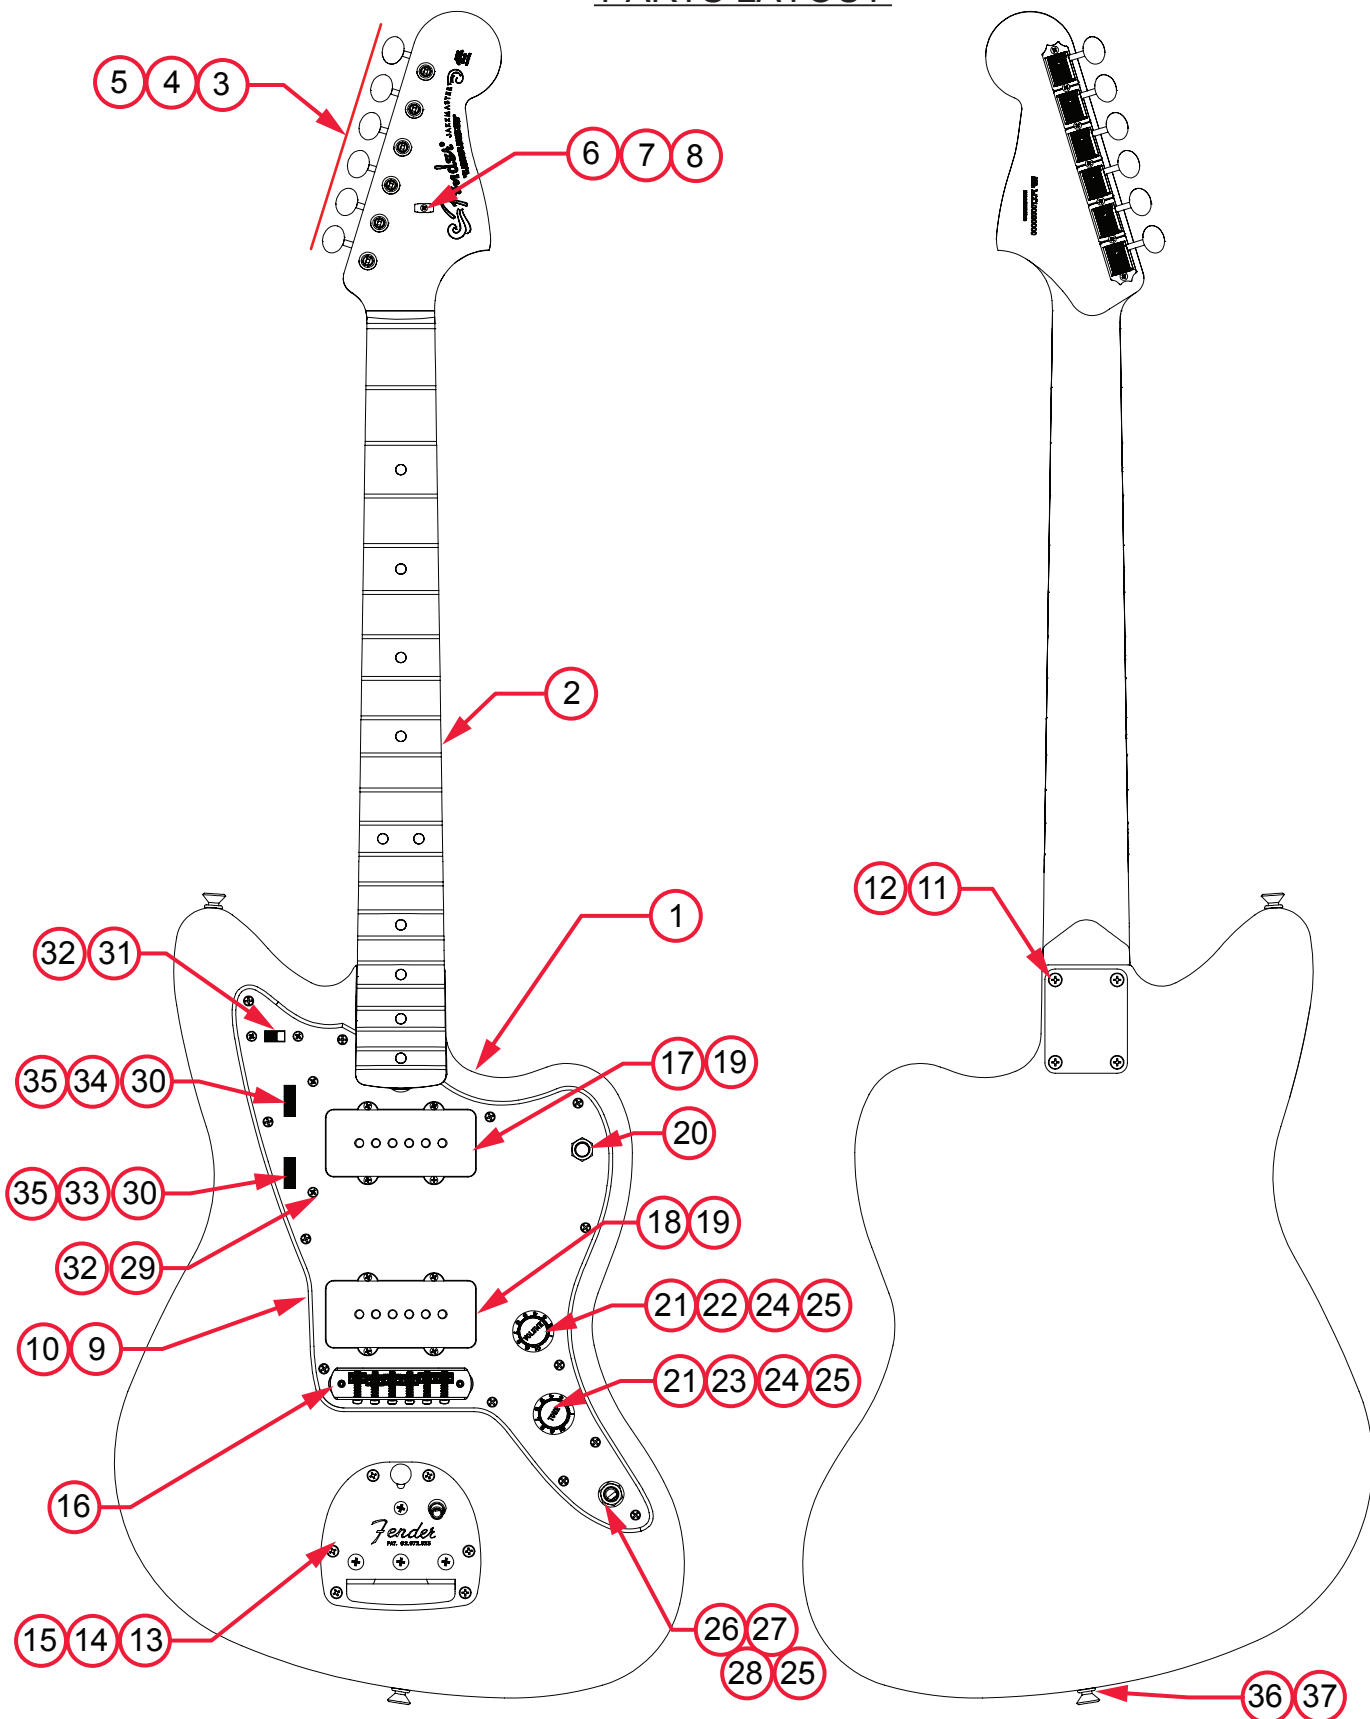


VINTERA 60'S JAZZMASTER®

(014-9753-XXX)

PARTS LAYOUT



VINTERA 60'S JAZZMASTER®
(014-9753-XXX)
PARTS LIST


REF #	DESCRIPTION	PART NUMBER
1	BODY 60S JAZMASTER OWT	7714955505
	BODY 60S JAZMASTER IBM	7714955583
2	NECK 60S JAZZMASTER PF OWT	7716786000
	NECK 60S JAZZMASTER PF IBM	7715918000
3	KEYS, VINT SET PING NKL W/BUSHINGS	0047912049
4	BUSHING KEY VINT PING	0053020000
5	SCREW # 3 X 3/8 SM RD HD NIC	0011357049
6	ORIGINAL STRAT STRING GUIDES	0994910000
7	SCREW # 3 X 5/8 SM RD HD NIC	0011358049
8	SPACER STR TREE 62 STRAT	0020423000
9	PICKGUARD 60s JAZZMASTER SS TORTOISE	7710596000
10	SCRW SMAB 4x1/2 OHP NI	0015578049
11	PLATE NECK,PLAIN,CHROME	0991447100
12	SCRW SMA 8x1-3/4 OHP NI	0015636049
13	TREM ASSY, JG/JAZ CHR W/O ARM	0076232049
14	ARM, VIB JAG/JAZZMASTER	0077422049
15	SCRW SMAB 5x1 OHP NI	0015610049
16	MUSTANG BRIDGE W/THREADED SADDLES	7705076000
17	PU ASSY 65 JAZZMASTER NK MEX AGD WHT	7716107000
18	PU ASSY 65 JAZZMASTER BRG MEX AGD WHT	7716108000
19	SCRW WD RND HD 3 X 1 NI	0016295049
20	SWITCH 3 POS TOGGLE AGED KNOB	0053694049
21	AGED STRAT KNOBS	0991369000
22	CONTROL 1 MG LINEAR SPLT SHAFT	0054453049
23	CONTROL 1 MG A TAPER SPLT SHFT	0054032049
24	WASHER INT LOCK .035"x3/8" NI	0056790000
25	NUT HEX 3/8-32 X 3/32 NICKEL	0016352049
26	JACK, PHONE OPEN W/HDWR	0021956049
27	WSHR FLAT 3/8x.614 NI	0031153049
28	WASHER LOCK INTL 3/8 X .687	0016436049
29	BRACKET CONTROL MTG JAZZMASTER	0054454049
30	KNOB DISC PRESET CNTRL 1"x.25	0054455049



VINTERA 60'S JAZZMASTER® **(014-9753-XXX)** **PARTS LIST**

[illegible]

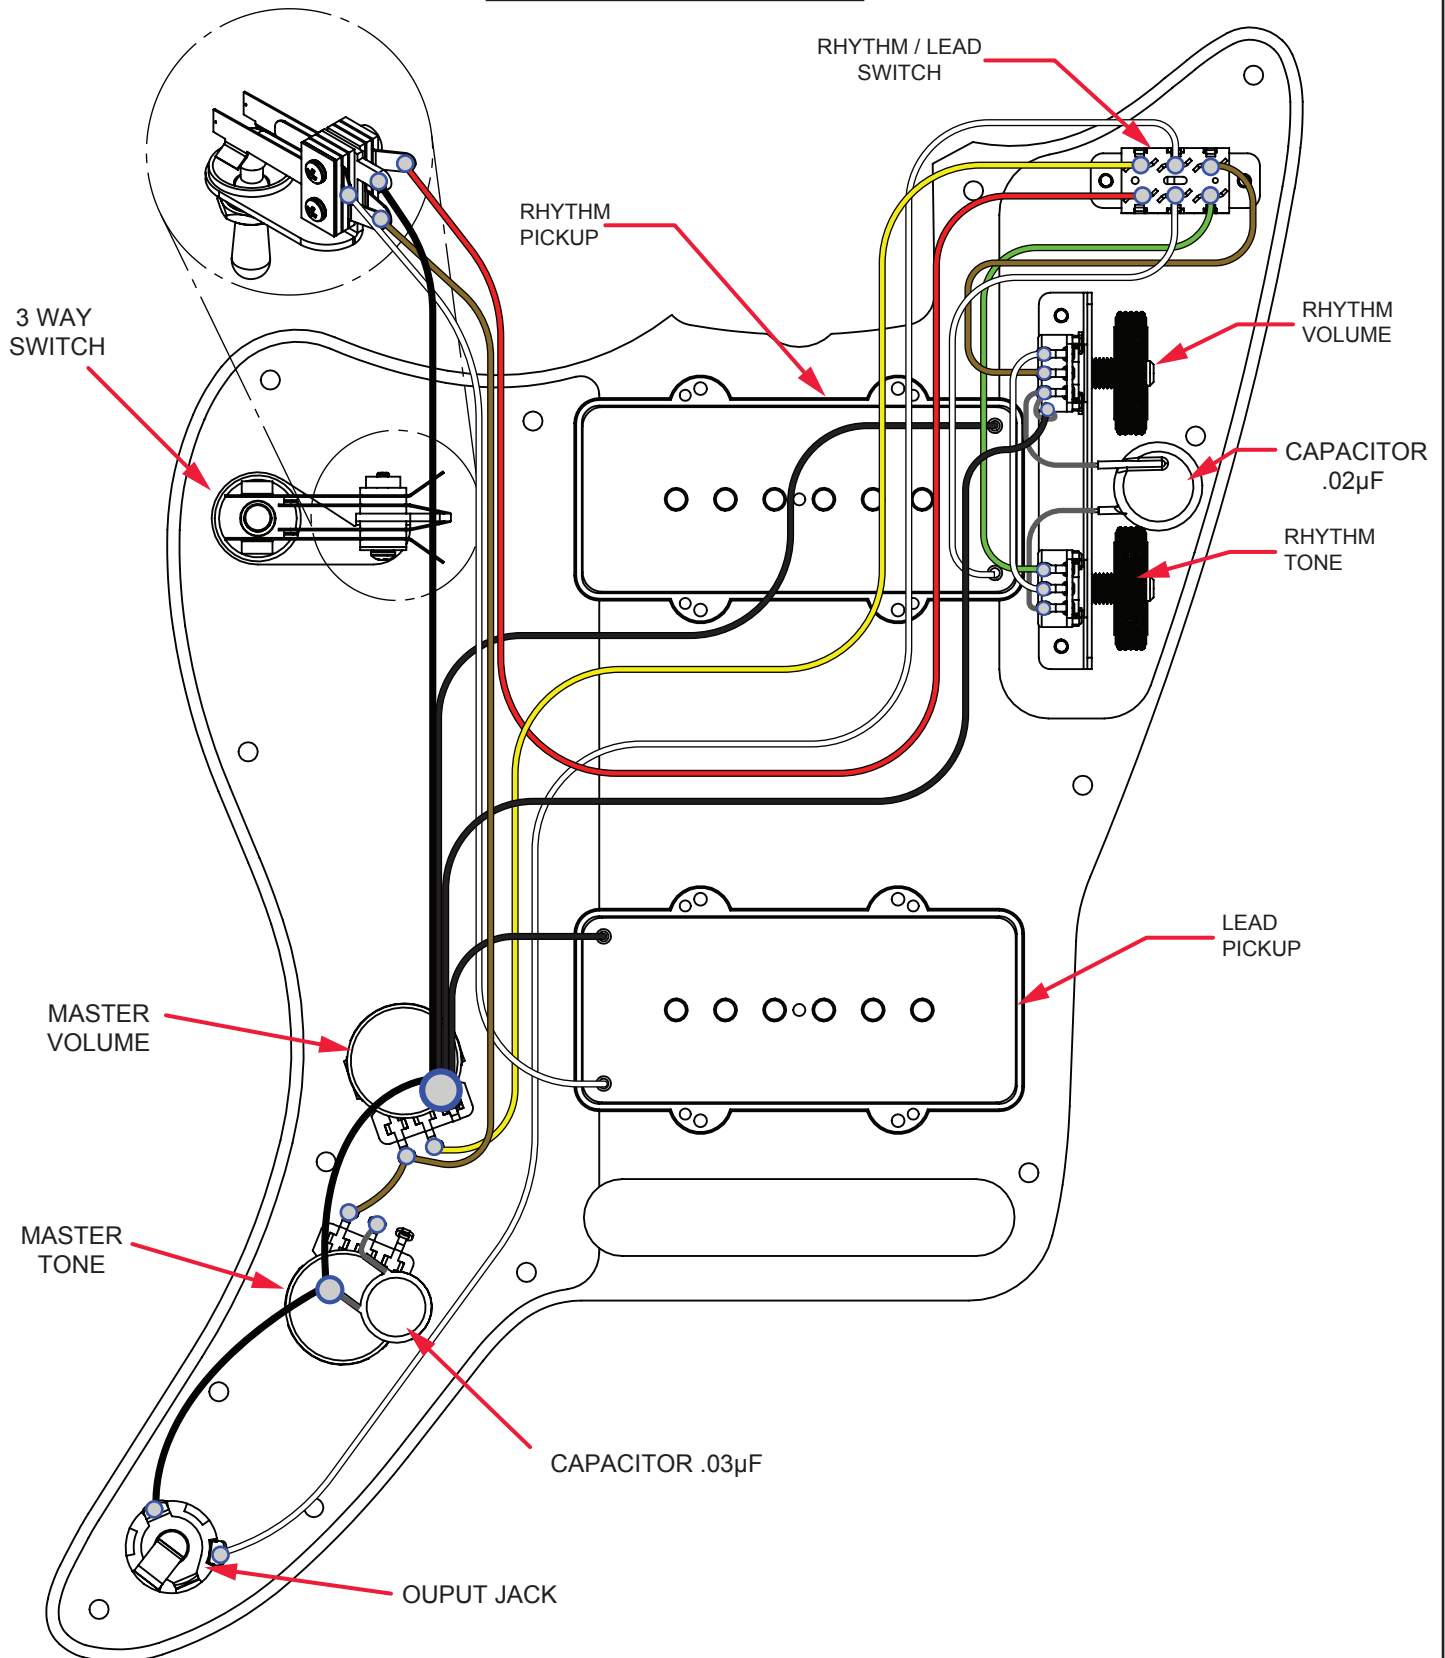VINTERA 60'S JAZZMASTER®
(014-9753-XXX)
WIRING DIAGRAM



VINTERA 60'S JAZZMASTER®

(014-9753-XXX)

SWITCH AND CONTROL FUNCTION

3 WAY SWITCH POSITION			
NOTE: OPERATIONAL ONLY WHEN RHYTHM/LEAD SWITCH IS IN LEAD POSITION			
 3	 2	 1	3 WAY SWITCH POSITION ←
			RHYTHM PICKUP ←
			LEAD PICKUP ←
	PICKUP IS ON		INDICATES POSITION OF 3 WAY SWITCH ↙  1
	PICKUP IS OFF		

NOTE: ONLY RHYTHM PICKUP IS FUNCTIONAL WHEN RHYTHM/LEAD SWITCH IS IN RHYTHM POSITION (LEAD PICKUP IS OFF)

RHYTHM/LEAD SWITCH

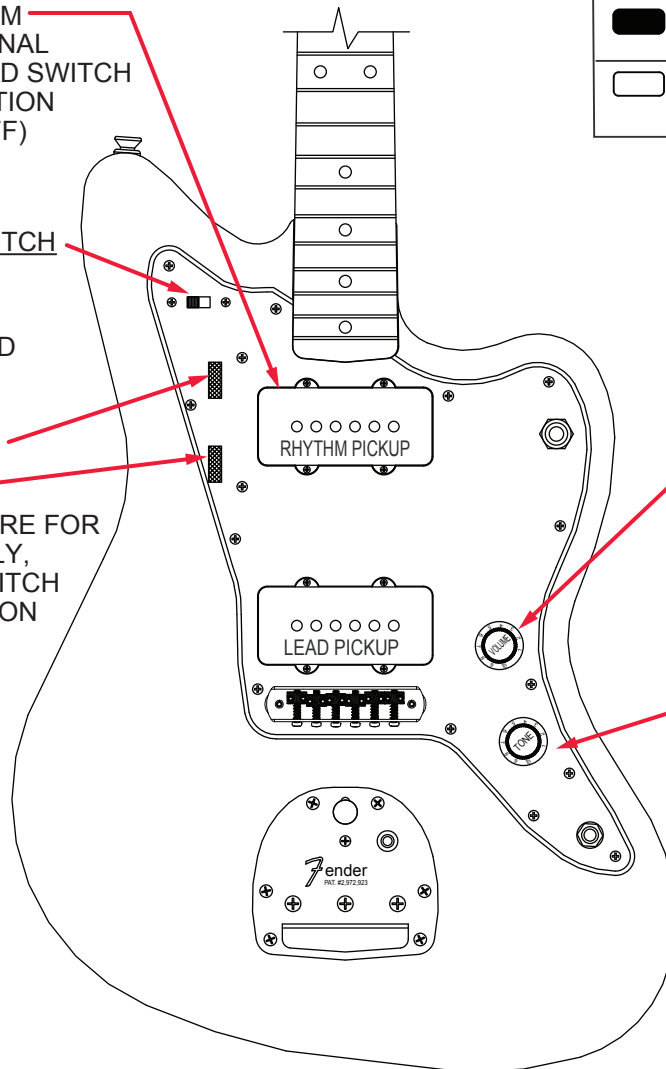
RHYTHM

LEAD

RHYTHM VOLUME

RHYTHM TONE

THESE FUNCTIONS ARE FOR RHYTHM PICKUP ONLY, AND ONLY WHEN SWITCH IS IN RHYTHM POSITION



MASTER VOLUME

WHEN RHYTHM/LEAD SWITCH IS IN LEAD POSITION (NON-FUNCTIONAL IN RHYTHM POSITION)

MASTER TONE

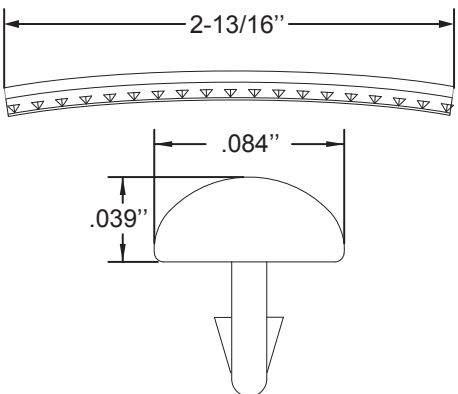
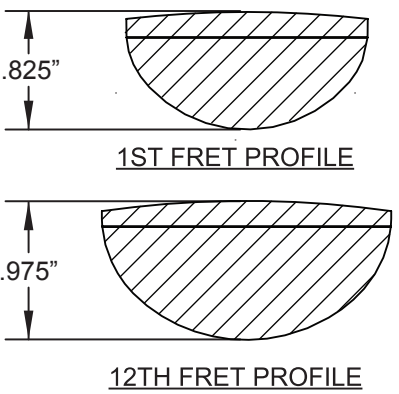
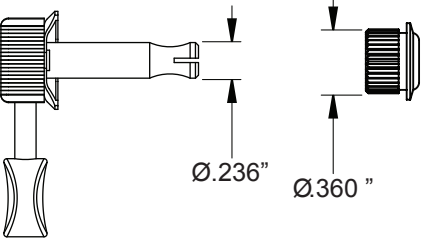
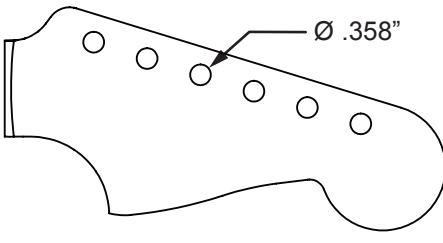
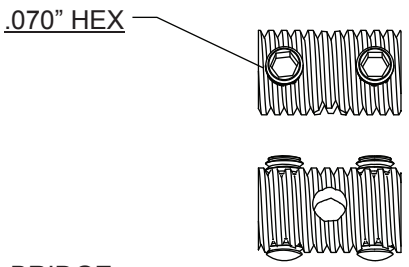
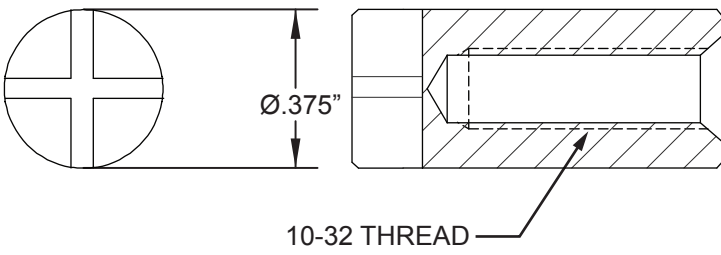
WHEN RHYTHM/LEAD SWITCH IS IN LEAD POSITION (NON-FUNCTIONAL IN RHYTHM POSITION)



VINTERA 60'S JAZZMASTER®

(014-9753-XXX)

ADDITIONAL SPECIFICATION DETAIL

FRET SIZE: VINTAGE (FRET DIMENSIONS ARE BEFORE INSTALLATION) 	PLEASE NOTE: AS EACH NECK IS SANDED & FINISHED BY HAND, THICKNESS DIMENSIONS MAY VARY SLIGHTLY FROM THOSE SHOWN.	NECK PROFILE: "C"  1ST FRET PROFILE 12TH FRET PROFILE																
KEY, VINT ST PING. P/N 0047912000 BUSHING KEY VINT PING P/N 0053020000 	TUNING MACHINE THRU-HOLE INNER DIAMETER .358" 																	
SADDLE HEIGHT ADJUSTMENT WRENCH: .070" HEX KEY  BRIDGE P/N 7705076000	TRUSS ROD NUT P/N 0012252000 																	
LOGO: DECAL FENDER JAZZMASTER APPLIED UNDER THE FINISH 	<table><tr><th colspan="4">PICKUP SPECIFICATIONS</th></tr><tr><th>POSITION</th><th>MAGNETS</th><th>DC RESISTANCE</th><th>POLARITY</th></tr><tr><td>NECK</td><td>ALNICO 5 UNBEVELED</td><td>6.1 - 7.5KΩ</td><td>NORTH</td></tr><tr><td>BRIDGE</td><td>ALNICO 5 UNBEVELED</td><td>6.1 - 7.5KΩ</td><td>SOUTH</td></tr></table>		PICKUP SPECIFICATIONS				POSITION	MAGNETS	DC RESISTANCE	POLARITY	NECK	ALNICO 5 UNBEVELED	6.1 - 7.5KΩ	NORTH	BRIDGE	ALNICO 5 UNBEVELED	6.1 - 7.5KΩ	SOUTH
PICKUP SPECIFICATIONS																		
POSITION	MAGNETS	DC RESISTANCE	POLARITY															
NECK	ALNICO 5 UNBEVELED	6.1 - 7.5KΩ	NORTH															
BRIDGE	ALNICO 5 UNBEVELED	6.1 - 7.5KΩ	SOUTH															

